

F16.1


200 j oper1 Password = "abc^123"

Service-Type = Login

204 - Cisco: AVPair = "shell:cmd-expr=show .\*",


206 —Cisco: AVPair = "shell:cmd-expr=telnet 10\.14\.0\.[0-9]+",

208 — Cisco: AVPair = "shell:cmd-expr=ping .\*"

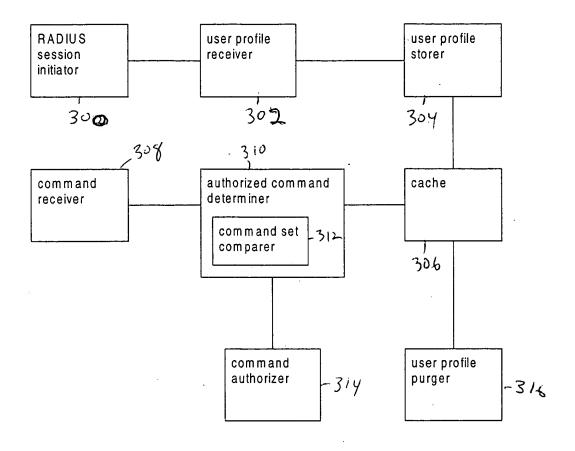

F16,3

then then the then that there is not the second that the then the then the then the then the then the

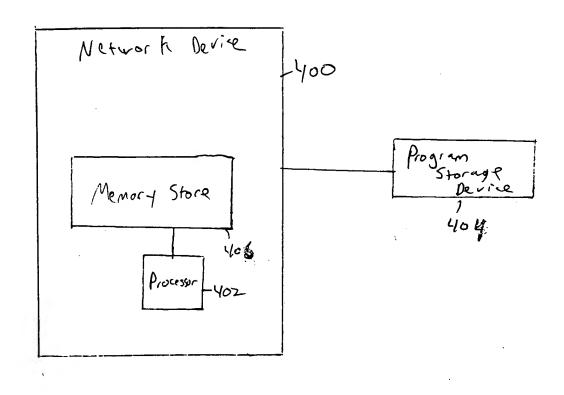

F16.4